



Briargate Supply

VISUAL PRODUCT GUIDE


Your Source for Truck & Trailer Accessories & Cargo Control Equipment

INDEX

Mud Flaps.....	3
Reflective Tape	4
Logo Reflective Tape.....	5
Cargo Control Equipment.....	6
Ratchet Straps	7
Winch Straps	8
Winch Straps Heavy Duty.....	9
Winches.....	10-12
Winch Bars.....	13
Load Binders	14
Chains, Hardware & Accessories.....	15-16
Corner Protection	17
Cargo Bar	18
Cargo Bar / Load Lock Bar	19
Decking Beam	20
Wood Beam Socket.....	21
Cargo Nets	22



Aerodynamic Mud Flaps

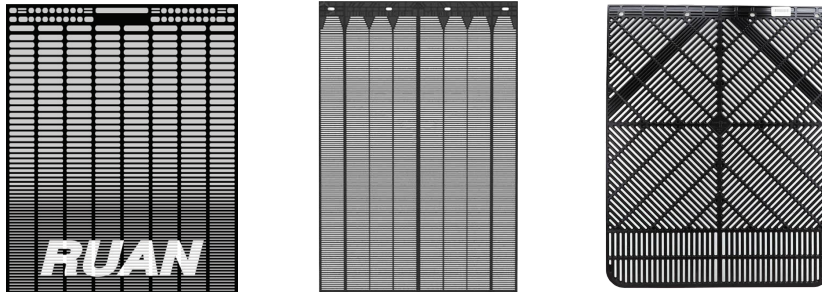


Rubber/Poly Mud Flaps



Custom Mud Flaps


- Sizes: 24" x 24", 24" x 30", 24" x 36", etc.
- Thickness: 3/16", 1/4", 3/8", 1/2", etc.
- Custom imprinting available
- Raised molded logo also available

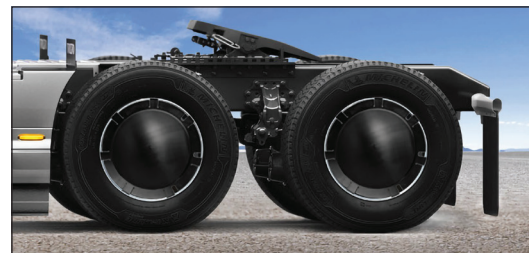


Aerodynamic ECO Caps



REFLECTIVE TAPE



Agricultural
Conspicuity Tape

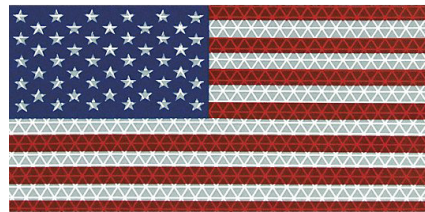


DOT Certified
American Flag Stickers




SAE Stickers




2" Solid White
DOT Reflective Tape

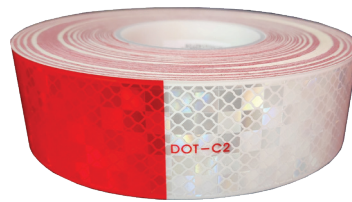


2" Red/White
DOT Reflective Tape

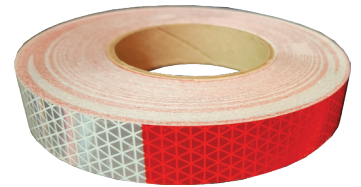

1" DOT Reflective Tape

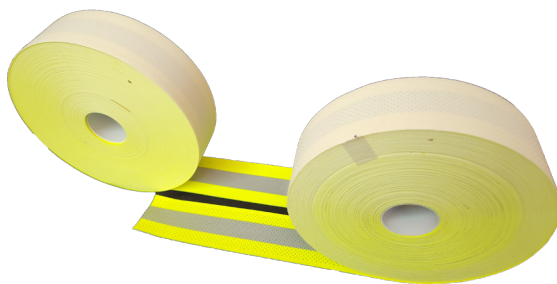



Sew On Reflective Tape

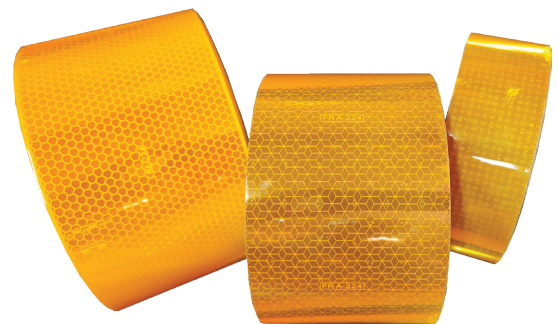

FRA Tape



DOT Reflective Tape
Available with your company logo



CARGO CONTROL EQUIPMENT



CARGO CONTROL EQUIPMENT

CONSIDER LOGO IMPRINT ON YOUR STRAPS. INCREASE YOUR COMPANY BRANDING. MINIMUM ORDER FOR CUSTOM PRINT – 250 UNITS

- Custom Logo Available on all straps
- 2", 3", 4" Winch Straps & Ratchet Straps
- End Fittings: Flat Hook, Wire Hook, Delta Ring, Soft Eye & Chain Anchor & Grab Hook



1", 1.5", 2" and 4" Width Available with Wire Hook, Delta Ring, Chain Anchor, Forged Hook and Flat Hook. Special Coated Extreme Anti Abrasive Webbing Available.

E-STRAPS

	<p>12' Yellow Webbing with E-Fitting Working Load Limit: 1,500 lbs./680 kgs.</p>
	<p>16' Grey Webbing with E-Fitting Working Load Limit: 1,500 lbs./680 kgs.</p>
	<p>20' Blue Webbing with E-Fitting Working Load Limit: 1,500 lbs./680 kgs.</p>

END HOOK TYPES



Flat Hook



Wire Hooks



Chain Anchor



Delta Ring

2" RATCHET STRAP



27'
30' With Flat Hooks
Working Load Limit: 3,335 lbs./1513 kgs.



27'
30' With Chain Anchors
Working Load Limit: 3,335 lbs./1513 kgs.



30' With Wire Hooks
Working Load Limit: 1,670 lbs./757 kgs.



27'
30' With Wire Hooks
Working Load Limit: 3,335 lbs./1513 kgs.



27'
30' With Flat Hooks, Abrasion Clip
Working Load Limit: 3,335 lbs./1513 kgs.

4" RATCHET STRAP



27'
30' With Flat Hooks, Abrasion Clip
Working Load Limit: 5,400 lbs./2450 kgs.



30' With 3705-3 Chain Anchors
Working Load Limit: 5,400 lbs./2450 kgs.



27'
30' With Wire Hooks
Working Load Limit: 6,670 lbs./3025 kgs.

WINCH STRAPS



2" Webbing
Working Load Limit: 3,335 lbs./1513 kgs.



2" Webbing With Chain Anchor 27', 30'
Working Load Limit: 3,335 lbs./1513 kgs.



2" Webbing with J hook
Working Load Limit: 1,670 lbs./751 kgs



3" Webbing With Flat Hook and Abrasion
Clip or web piece
Working Load Limit: 5,400 lbs./2450 kgs.
4" Webbing With Flat Hook and Abrasion
Clip or web piece
Working Load Limit: 5,400 lbs./2450 kgs
Both available in 27' 30' 35' 40' and 50'



3" Webbing With Delta Ring
Working Load Limit: 5,400 lbs./2450 kgs.
4" Webbing With Delta Ring
Working Load Limit: 5,400 lbs./2450 kgs.
Both available in 27' 30' 35' 40' and 50'



3" Webbing With Chain Anchor
Working Load Limit: 5,400 lbs./2450 kgs.
4" Webbing With Chain Anchor
Working Load Limit: 5,400 lbs./2450 kgs
Both available in 27' 30' lengths



2" Webbing with Double J hook Working
Working Load Limit: 3,335 lbs./1513 kgs.
3" Webbing Double J hook
Working Load Limit: 3,335 lbs./1513 kgs.
Both available in 27' 30' lengths

WINCH STRAP HEAVY DUTY



Premium Range Winch straps with Higher Break Strength, Heavy duty webbing, Stiffer edges and whole webbing is polyurethane impregnated for Extreme wear resistance. These are available in below variants* custom artwork and lengths available.



4" Webbing With Flat Hook
Working Load Limit: 6,670 lbs./3025 kgs.
Available in 27' & 30' lengths



4" Webbing With 30" chain anchor
Working Load Limit: 6,670 lbs./3025 kgs.
Available in 27' & 30' lengths



4" Webbing With Double J Hook
Working Load Limit: 6,670 lbs./3025 kgs.
Available in 27' & 30' lengths



4" Webbing With Delta Ring
Working Load Limit: 6,670 lbs./3025 kgs.
Available in 27' & 30' lengths



4" Webbing With Sewn Loop
Working Load Limit: 6,670 lbs./3025 kgs.
Available in 27' & 30' length

WELD-ON WINCHES

Weld-on winches are designed to be permanently mounted in a fixed position.



Standard



Storable



Low Profile

BOLT-ON WINCHES

Portable winches allow flexibility of winch placement along the trailer side channel



Standard



Low Profile

SLIDING "C" WINCHES AND C TRACK

Sliding winches are mechanisms that easily move in both directions for positioning along a track. They firmly lock in place when tension is applied to the webbing, ensuring secure cargo fastening during transportation.



Low Profile



Standard



Storable



C-Track



Galvanized -
Three-Bar
Sliding

DOUBLE 'LL' SLIDING WINCHES

The sliding webbing LL winch provide an efficient and flexible securement system. The winch moves easily in both directions, and locks firmly in place when tension is applied.



Low Profile



Standard



Storable



J Hook Receiver

COMBINATION WINCHES

Double-duty combination winches are designed to be used with webbing or wire cable.

Cable Working Load Limit: 3335 lbs./1515 kgs.

Web Working Load Limit: 5,000 lbs./2270 kgs



Combination, Sliding



Standard, Weld On
with 5/8" diameter x
2" long post



Low Profile, Weld On
with 5/8" diameter x
1" long post

BOLT-ON WEBBING WINCHES

Bolt-on winches are designed to bolt onto side rail and bottom flange of side rail.



Side Mount



Bottom Mount

3 BAR WINCHES

Working Load Limit: 5,000 lbs./2270 kgs.
Available in C track, Double LL and Weldable type.



Low Profile



Standard



Storable

LASHING WINCH

This versatile winch can be welded or bolted in place like a standard winch, but offers the quick release and easy operation of a ratchet buckle. 1-1/8" hex wrench required.

Working Load Limit:
3,335 lbs./1513 kgs.
Weight: 3.8 lbs./1.7 kgs.



WINCH BAR-STD. MUSHROOM TIP, GROOVED TIP CHROME AND PAINTED



WINCH BAR-COMBINATION BOX END CHROME (MUSHROOM & GROOVED TIP)



LOAD BINDERS



Load Binders are used to restrain chains of different sizes clamp, bind, anchor and tie down large loads. Heavy Duty Drop forged handles and Hooks, Heat treated and proof tested



Ratchet Binder



RATCHET BINDER, LEVER BINDER & FOLDING BINDER

Chain Size	WLLlbs
1/4" - 5/16"	2000
5/16" - 3/8"	5400
5/16" - 3/8"	6600
3/8" - 1/2"	9200
1/2" - 5/8"	13000



Lever (Snap) Binder



Folding Binder

TRUCKERS TRANSPORT CHAINS

- G70 Chain Assemblies 5/16", 3/8" and 1/2 "with Grab hooks
- Chain Assemblies with Clevis Hooks
- G70 Chain Uncut
- All chains as per NACM and IS standards



COIL RACK

Load Steel Coils Safely

- Creates a temporary cradle on which to load a standard steel coil.
- Lay coil racks flat on the trailer bed & place 4x4s against the retaining edges.
- Lightweight and completely portable.
- 10-gauge, heavy-duty steel construction is extremely durable and reliable.
- Can be precisely positioned or easily transferred between vehicles.



COIL BLOCKS


4x4 with Chamber
36", 48" and 60"

D RINGS (WELD ON AND BOLT-ON TYPES)

Trailer Tie Down, Heavy duty Trailer Tie Down, Bolt On D- rings, Welded D -rings, Recessed D -rings, Stake Pocket D -rings, Flush

Mount D-rings

Available in 5/16" , 3/8" , 1/2" , 1" in both weld on and clip bolt type.

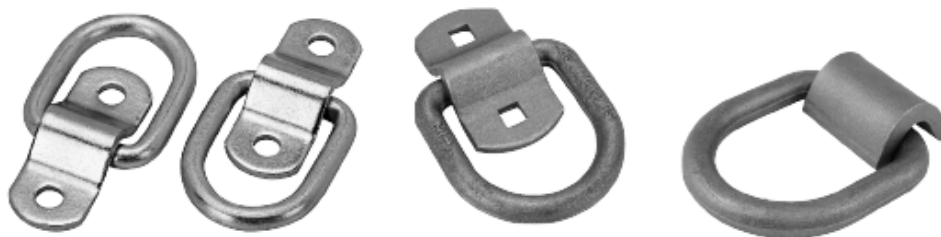


CHAINS, HARDWARE & ACCESSORIES

E TRACK

E-track is a versatile cargo securement system used in trailers, vans, and logistics. It can create various types of constraints (horizontal, vertical, lateral, and radial) to secure a wide range of cargo. E-track consists of 12-gauge steel rails attached to walls or floors of trailers, secured with screws, rivets, or welding, depending on the load requirements.

60" or 120" Lengths

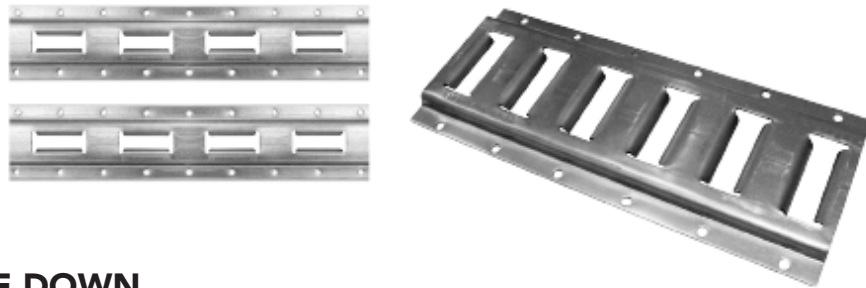

FLOOR CHAIN TIE DOWN

Floor Chain Tie-Down Models:


- Bolt-On Plated Floor Chain Tie-Down:
Working load limit - 6,000 lbs./2,724 kg.
- Weld-On Black E-coat Floor Chain Tie-Down:
Working load limit - 6,000 lbs./2,724 kg.



E TRACK BIN , HELMET STORAGE AND TOOL STORAGE

Storage Bins NESTING feature to save space and to hold different articles inside trucks can be attached to all E tracks, X tracks

*Custom Color, Custom Marking with different ends available on request.

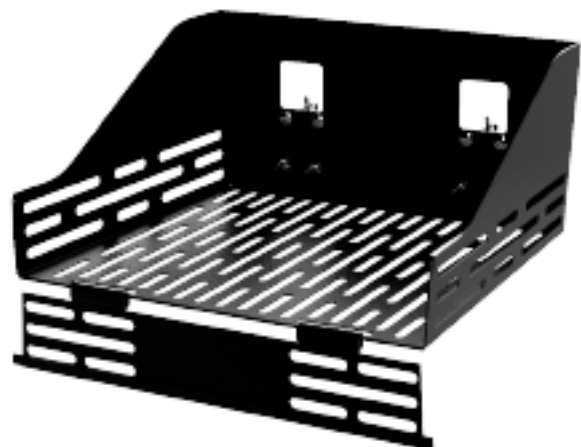

CORNER PROTECTION



MOST POPULAR MOST RUNNING. Goes for all 2"-4" Straps.



Heavy Duty Jumbo Corner for 2" Straps. Also has edge for drum edges.



Most Popular Steel corners made of Steel to be used with Steel Chains. One is Bare steel and other is Rubber lined for Coils without packing.
Plain steel
Rubber coated steel



New Combo Corners of steel for Steel Chain as well as Strap.
Inner modulations for Chains and Outer one for strap 2-4" wide.



Butterfly corner protector popular with one way lashing systems up to 2" straps

CARGO BAR

- Quickly secure large, heavy loads in your vehicle with the ratcheting Cargo Bar from Core.
- The Cargo Bar easily mounts in the bed or cargo area of your pickup, Container or closed body-no tools needed.
- Precision ratchet mechanism extends the Cargo Bar to variable sizes.
- The Cargo Bar uses your vehicle's natural rigidity to form a super-secure cargo restraint.
- "Easy-Grip" handle and exclusive ratchet-lock deliver massive holding power.
- The Cargo Bar is constructed of heavy-duty steel and features a durable finish.
- Rubber-coated feet assure a solid, non-slip grip that won't damage your vehicle.
- The Cargo Bar is lightweight and easy to maneuver
- Retracts small enough to stow behind your seat when not in use

CARGO BAR CBPTS/CBPTA

Length	Diameter	Material
89-104"	38mm	Steel
89-104"	38mm	Aluminum



CARGO BAR / LOAD LOCK BAR


Length	Long Tube Diameter	Tube Thickness	Material
90"-105"	38mm	1.5 mm	Steel
90"-105"	38mm	1.5 mm	Aluminum
89.75"-104.5"	38mm	1.5 mm	Steel
89.75"-104.5"	38mm	1.5 mm	Aluminum
89"-104"	38mm	1.5mm	Steel
89"-104"	38mm	1.5mm	Aluminum



CARGO BAR WITH WELDED HOOP SETS

Constructed of heavy wall galvanized steel tubing for increased strength and durability, Cargo Load bars with welded hoop sets are ideal for shoring applications that require a larger holding surface area.

Adjusts from: 90" to 105"
Weight: 23.8 lbs./10.8 kgs .

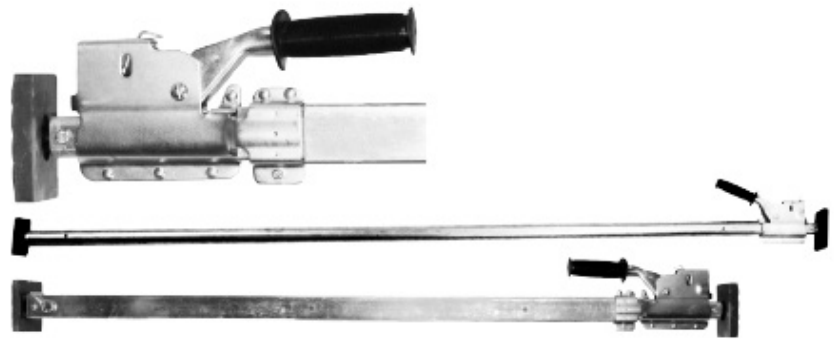

JACK STYLE CARGO BAR

- Universal Design Fits Any Trailer.
- Heavy-duty jack bar with telescopic design.
- Adjustment range of 51" to 114".
- Fits the bed of most full-size pickup trucks.
- Fits any interior van application.
- Heavy Duty.
- Cushioned non-slip grip and non-marking rubber feet.

Size: 24.0" x 29.0"

Weight: 13.3 lbs/6.1 kgs.



DECKING BEAM

ALUMINUM DECKING BEAM

Extra heavy-duty aluminum decking/shoring beams are designed for the most severe applications. The beams are extruded high-strength aluminum and have 70% more aluminum than the heavy-duty beam for added strength and durability.

NOTE: Special length beams are available.



DBB0S0-6

Adjusts from: 88.0" to 97.r for 96" Trailers

Weight: 32.5 lbsJ14.8 kgs.

DBB0S0-5

Adjusts from: 92.9" to 102.6" for 96" and 102" Trailers

Weight: 33.0 lbsJ15.0 kgs.

Decking Nertical Rating: 4,000 lbs./1814 kgs. working load limit based on evenly distributed load.

Shoring/Horizontal Rating: 3,000 lbsJ1360 kgs. working load limit based on evenly distributed load.



SERIES E STEEL BEAMS

Steel decking/shoring beams are made from high strength galvanized 2" x 3" rectangular welded steel tubing. Head assemblies are all steel, zinc plated and tapered for ease of operation. Trigger and spring are built for long-lasting positive lock control.



DBS-1- For 96" and 102" Trailers

For inside trailer width of: 92" to 103" Weight: 26.0 lbsJ11.79 kgs.

DeckingNertical Rating: 2,000 lbs./909 kgs. uniformly distributed working load limit.

Shoring/Horizontal Rating: 1,350 lbs./680 kgs. uniformly distributed working load limit.



WOOD BEAM SOCKET



SERIES E OR A WOOD BEAM SOCKETS


Ferretero offers both standard and heavy duty beam sockets designed for use with standard commercial grade 2" x 4" or 2" x 6" lumber.




Standard
Features include zinc plating and a positive locking mechanism.



Heavy Duty
Features include zinc plating, a positive locking mechanism and reinforcement for added strength.



CARGO NETS

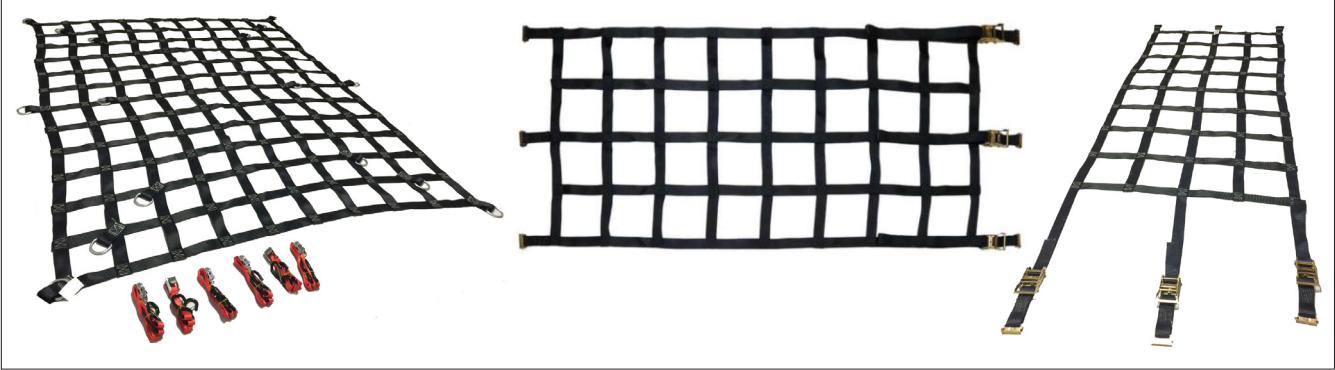



Briargate Supply

Our Mission

Briargate Supply services the commercial transport industry with niche products to help our customers increase their market share by leveraging branded truck & trailer safety accessories for the trailer and fleet industries.

DES MOINES, IA

CHICAGO, IL

844-394-4419 • www.briargatesupply.com
sales@briargatesupplyllc.com